

200W Auto-Ranging Industrial Series

PSA-2041U Multiple Output Switching Power Supply



G
N
O
T
H
I
S

Features

- High efficiency
- Built-in EMI filter
- 100% Burn-in for 24 hours
- Low output ripple
- Small low profile package
- Short circuit protection
- Over voltage protection

Applications

- File servers
- Peripheral equipment
- Microprocessor based systems
- Industrial controls

Safety Approvals

- UL 1950
- CSA 22.2 1402C Level 3
- TUV EN 60950 [IEC 950]

Mechanical Characteristics

- Dimensions:
- Length: 203.2mm (8in.)
 - Width: 114.3mm (4.5in)
 - Height: 50.4mm (2in)
 - Weight: 1.27Kgs (2.8lbs)

Output Specifications

Model	DC Output Voltage	Load			Ripple P-P	Total Tolerance
		Min.	Max.	@30 CFM		
PSA-2041U	+5V	5.0A	12A	25A	50mV	+1%
	-5V	0.4A	1.5A	2A	100mV	+6%
	-12V	0.4A	1.5A	2A	120mV	+6%
	+12V	1.0A	3.0A	5A	120mV	+6%
PSA-2042U	+5V	5.0A	12A	25A	50mV	+1%
	+12V	0.4A	1.5A	2A	120mV	+6%
	-12V	0.4A	1.5A	2A	120mV	+6%
	+12V	1.0A	3.0A	5A	120mV	+6%
PSA-2044U	+5V	5.0A	12A	25A	50mV	+1%
	-12V	0.4A	1.5A	2A	120mV	+6%
	+12V	0.4A	1.5A	2A	120mV	+6%
	+24V	0.5A	1.5A	2.5A	200mV	-5+7%

(1) The maximum continuous output power shall not exceed 100 watts with convection cooling, and 150 watts with 30 CFM air cooling.
 (2) Ripple & noise is measured at 20MHz bandwidth limit by using a 10in. twisted wire terminated with a 10µF capacitor in parallel with a 0.1µF ceramic capacitor.

ISO 9001 • BAPT
Facility Approvals



ENTERPRISE CO., LTD.

16, Lane 530, Chung Cheng N. Rd.
Sanchung City, Taipei
Taiwan 24103, R.O.C.
Phone: 886-2-988-2126
886-2-980-5255
Fax: 886-2-981-7086
886-2-983-3222

PHIHONG USA

U.S. Headquarters:
48607 Warm Springs Blvd.
Fremont, CA 94539
Phone: (510) 445-0100
Fax: (510) 445-1678
Email: usasales@phihongusa.com
Internet: <http://www.phihongusa.com>

Eastern Office:
3005 Brodhead Road
Bethlehem, PA 18017
Phone: (610) 866-9911
Fax: (610) 866-9920

Southwestern Office:
3325 Cochran St., Suite 200
Simi Valley, CA 93063
Phone: (805) 520-8177
Fax: (805) 520-3907

200W Auto-Ranging Industrial Series
.....
PSA-2041U
Multiple Output Switching Power Supply

Characteristics

AC Input Voltage
90-132/180-264VAC
(Auto ranging)

AC Frequency
47 to 63Hz

AC Input Current
90-132VAC 5.0A (rms)
180-264VAC 2.5A (rms)

DC Output
See Chart

Efficiency
70% typical at moninal AC line
and full load

Hold-up Time
16msec. at moninal AC line
and full load

Overvoltage Protection
Built-in at 110-130% of main output

Overcurrent Protection
>130% of rated output power

Operation Temperature
0 to 40°C

Storage Temperature
-25 to 85°C

Temperature Coefficient
0.02% per°C


Insulation Resistance
50M ohm minimum from input to
output, input to ground

MTBF
Calculated
75,000hrs. at 25°C half load
40,000hrs. at 25°C full load

EMI Requirements
Meets conduction limits of
FCC class A rules
VDE 0871 class A

Inrush Current
50A max. @ cold start

Dimension Diagram Unit: mm (inch)

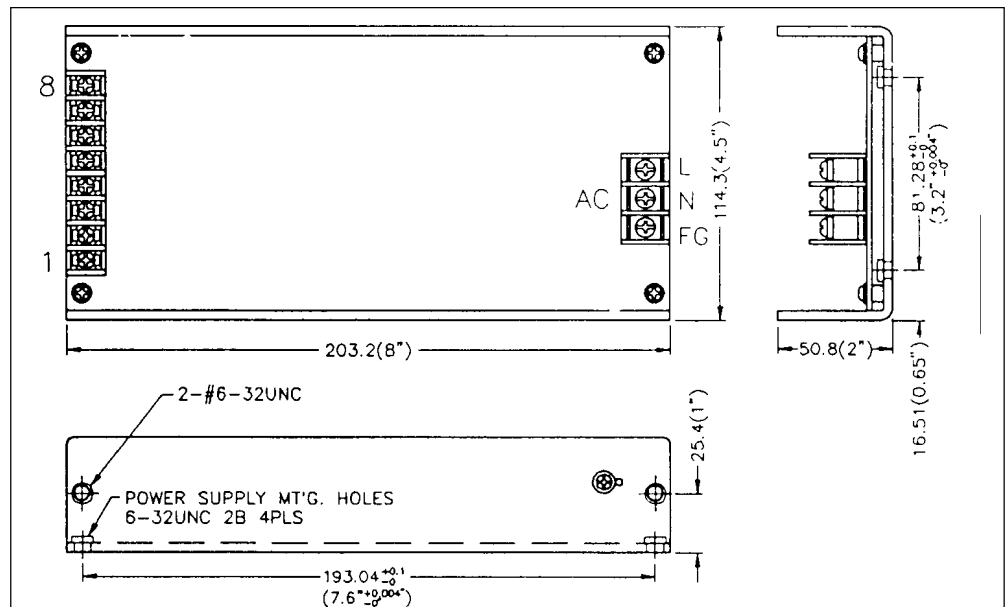

Pin	Model	PSA-2041U	PSA-2042U	PSA-2044U
1		+5V	+5V	+5V
2		+5V	+5V	+5V
3		RTN	RTN	RTN
4		RTN	RTN	RTN

Pin	Model	PSA-2041U	PSA-2042U	PSA-2044U
5		-5V	+5V	-12V
6		-12V	+5V	+12V
7		RTN	RTN	RTN
8		RTN	+12V	+24V

2041U M/704