




65W 2"x4" Open Frame Medical Power Supply Series

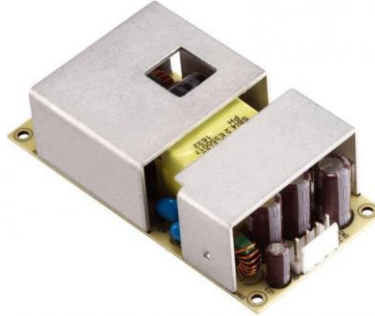

Features

- 2x4"
- 5000 Meter Operating Altitude
- OVP, SCP and OCP
- < 100 μ A Touch Current
- Meets IEC 60601-1-2 Edition 4
- Low Cost
- Class B EMI
- Meets DOE Level VI
- Class II Design
- 2X MOPP

Applications

- Medical

Safety Approvals

- IEC/EN/ANSI/AAMI ES 60601-1 (ED 3.1)

Mechanical Characteristics

- Length: 101.6mm (4in)
- Width: 50.8mm (2in)
- Height: 28.1mm (1.12in)
- Weight: 141g (4.97oz)

Output Specifications

Model	Output Voltage	Max Current	Output Power	Regulation	Ripple & Noise ¹ P-P(max)
PML065-120	12V	5A	60W	\pm 5%	150mV
PML065-150	15V	4.34A	65W	\pm 5%	150mV
PML065-180	18V	3.62A	65W	\pm 5%	180mV
PML065-190	19V	3.43A	65W	\pm 5%	190mV
PML065-240	24V	2.71A	65W	\pm 5%	240mV
PML065-480	48V	1.36A	65W	\pm 5%	480mV

Notes: 1. 20 MHz bandwidth frequency oscilloscope and add a 0.1 μ F multilayer cap. and a Low ESR electrolytic cap. (10 μ F) at output connector terminals. (at nominal line voltage, full load)

Phihong is not responsible for any errors and reserves the right to make changes without notice. Please visit our website at www.phihong.com/ for the most up-to-date specifications and contact information.

INPUT:**AC Input Voltage Range**

90 to 264VAC

AC Input Current

1.6A max

Leakage Current

<0.1mA

AC Input Frequency

50-60Hz

AC Inrush Current

80A max/230VAC

(cold start at 25°C, full load)

Input Power Saving $\leq 0.21\text{W}$ at 230VAC, no load**OUTPUT:****Efficiency** $\geq 88\%$ average at 115VAC & 230VAC**Over Voltage Protection**

V out 150%

Short Circuit Protection

Auto-recovery after short-circuit fault being removed

Over Current Protection

I out 180%

ENVIRONMENTAL:**Temperature**

Operation 0 to +50°C

Non-operation -20 to +80°C

Humidity

Operating 20% to 80%

Storage 10% to 90%

EMC

Complies with FCC Class B

Complies with EN55032 Class B

Dielectric Strength

Cut off current 10mA

Primary to secondary 4000VAC for 1min

Insulation Resistance

Primary to secondary 10M ohm for 500VDC

Input Connector

CN1 Molex 26-60-4020 or equivalent

Output Connector

CN2 Molex 26-60-4040 or equivalent

Dimension Diagram Unit: mm

