



Single Port 15.4W Power over Ethernet Desktop POE15W-560 Passive Power Injector



Features

- No Detection – passive injector
- Non-Vented Case
- Small case size
- 1 Year Warranty
- Gigabit data rates
- Full Protection OCP, OVP
- Level VI Efficient
- Low Cost

Applications

- IP Telephones
- Wireless Network Access Points
- Security Cameras

Safety Approvals

- cUL/UL 60950
- IEC/EN 60950-1
- CE
- LPS

Mechanical Characteristics

- Length: 106mm (4.17in)
- Width: 40mm (1.57in)
- Height: 27mm (1.1in)
- Weight: 100g (3.5oz.)

Output Specifications

Model	DC Output Voltage	Load		Regulation		Input Connector	Output Power
		Min.	Max.	Line	Load		
POE15W-560-R ¹	56V	0A	0.275A	±5%		C8	15.4W

Notes: (1) Consult factory for availability

Phihong is not responsible for any error, and reserves the right to make changes without notice. Please visit our website at www.phihong.com for the most up-to-date specifications and contact information.

INPUT:**AC Input Voltage Range**

90 to 264VAC

AC Input Voltage Rating

100 to 240VAC

AC Input Current

0.5A (RMS) max for 90VAC

0.35A (RMS) max for 240VAC

Leakage Current

0.25mA max @ 254VAC 60Hz

AC Input Frequency

47-63Hz

AC Inrush Current

30A for 115VAC @max load

60A for 230VAC @max load

No Load Power Consumption

<100mW at 115Vac

<75mW at 230Vac

OUTPUT:**Total Output Power**

15.4W

Ripple and Regulation

200mV max @25C, 115VAC, 60Hz &

230VAC, 50Hz

Efficiency

Meets Level VI requirements

Hold-up time:

16mS min at max load and 120VAC, 60Hz

ENVIRONMENTAL:**Temperature**

Operation -20 to +50°C

Non-operation -25 to +75°C

Humidity 5 to 90%

EMC

Complies with FCC Class B

Complies with EN55032 Class B

Immunity EN50082-1

ESD: EN61000-4-2. Level 3

RS: EN61000-4-3. Level 2

EFT: EN61000-4-4. Level 2

Surge: EN61000-4-5. Level 3

CS: EN61000-4-6. Level 2

Voltage Dips EN61000-4-11

Harmonic: EN61000-3-2 Class A

Isolation Test

Primary to Secondary: 3000VAC for 1

second 10mA

Insulation Resistance

Primary to Secondary: >10M OHM

500VDC

FEATURES:**Over Voltage Protection**

Voltage between 2 SELV conductors shall not exceed 42.4Vpk or 60VDC for longer than 0.2 sec. Limit of 71 VPK or 120VDC shall not be exceeded – latching.

Over Current Protection

≤400mA

Short Circuit Protection

Continuous, no damage

Indicator

Solid BLUE: Power “ON”


Data in/Output Connector

RJ45

E option = Earth grounded shielded Rj45 connectors

Output Connection

+pin 3,6 / -pins 1,2

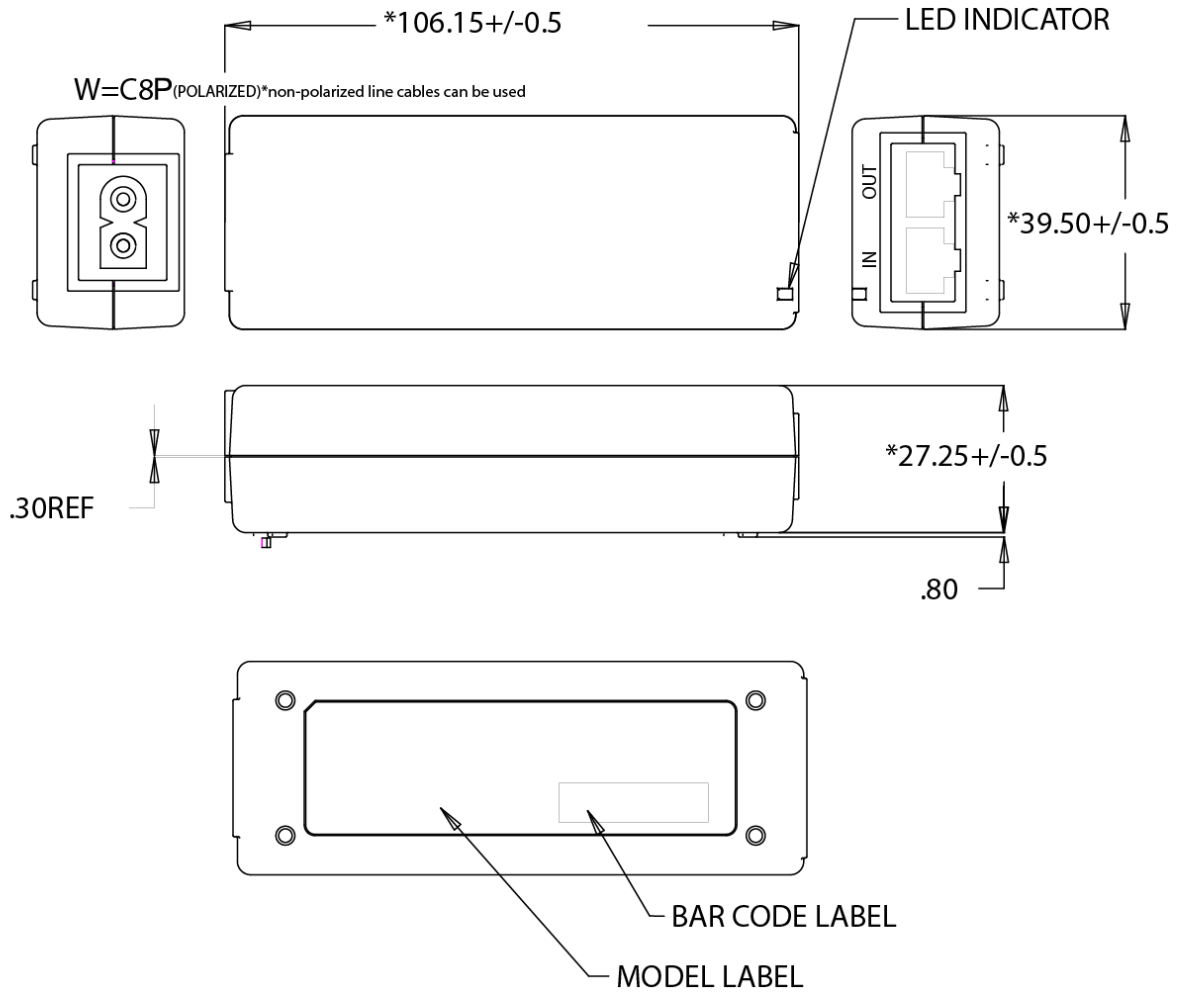

Supplier's Declaration of Conformity
47 CFR § 2.1077 Compliance Information

Phihong USA Corporation
47800 Fremont Boulevard
Fremont, CA 94538
Telephone: (510) 445-0100
www.phihong.com

NOTE: This model has/The models in this products series have been tested and found to comply with the limits for a Class B digital device, pursuant to part 15 of the FCC Rules. These limits are designed to provide reasonable protection against harmful interference in a residential installation. This equipment generates, uses and can radiate radio frequency energy and, if not installed and used in accordance with the instructions, may cause harmful interference to radio communications. However, there is no guarantee that interference will not occur in a particular installation. If this equipment does cause harmful interference to radio or television reception, which can be determined by turning the equipment off and on, the user is encouraged to try to correct the interference by one or more of the following measures:

- Reorient or relocate the receiving antenna.
- Increase the separation between the equipment and receiver.
- Connect the equipment into an outlet on a circuit different from that to which the receiver is connected.
- Consult the dealer or an experienced radio/TV technician for help.

Changes or modifications to equipment not expressly approved by PHIHONG could void the user's authority to operate the equipment.