




**5W Compact Fixed Blade Power Adapter (North America)  
Level V Efficiency Compliant USB Adapter**

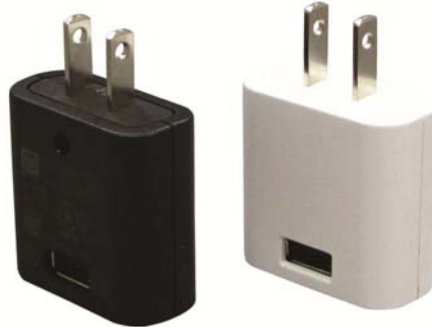

**Features**

- Fixed Blade
- Halogen Free
- Level V Compliant
- Low Cost
- No Load Power Draw <0.03W
- Low Profile

**Applications**

- Smart Phones
- PDAs
- Personal Electronics
- Digital Cameras

**Safety Approvals**

- cUL/UL

**Mechanical Characteristics**

- Length: 42mm (1.65in)
- Width: 43mm (1.65in)
- Height: 21.0mm (0.87in)
- Weight: 80g (3oz)

**Output Specifications**

Model	DC Output Voltage	Load		Ripple <sup>(1)</sup> P-P (Max)	Regulation		Case Color
		Min.	Max.		Line	Load	
PSA05A-050QA-H	5V	0A	1A	200mV	±5%		Black
PSA05A-050QW-H	5V	0A	1A	200mV	±5%		White

Note: (1) Measured after 10 minutes with by-pass capacitors 0.1uf// 10uf at output connector terminal and oscilloscope set at 20MHz.

Phihong is not responsible for any error and change. Content is subject to change without notice. Please consult the Phihong directly or visit [www.midspans.com](http://www.midspans.com) for the most up-to-date specifications.

**INPUT:****AC Input Voltage Rating**

100 to 240VAC

**AC Input Voltage Range**

90 to 264VAC

**AC Input Current**

0.15A(RMS) max.

**Leakage Current**5 $\mu$ A maximum**Input Power Saving**

&lt;30mW max

**OUTPUT:****Power**

5W Continuous

**Efficiency**

Meets Level V Efficiency Requirements

**No-Load Power Saving**

0.03W maximum at 115VAC/230VAC

**Hold-up Time**

10mS min. @ 120VAC and max. load

**Short Circuit Protection**

Output may be shorted permanently without damage

**Over-voltage Protection**

Output shall not exceed 10V

**ENVIRONMENTAL:****Temperature**

Operation	0 to +40°C
Non-operation	-40 to +85°C
Operation	10 to 90%

**Immunity**

ESD:	EN61000-4-2. Level 4
Surge:	EN61000-4-5. Level 3
Harmonic:	EN61000-3-2
Flicker:	EN61000-3-3

**Emissions**

FCC Class B  
EN55022 Class B

**Dielectric Withstand (Hi-pot) Test**

Primary to Secondary: 3000VAC, 10mA for 1 minute

**Insulation Resistance**

Primary to Secondary: 10M ohm 500VDC

**MTBF**

100K hours minimum at 120VAC, max load (measured at ambient 25°C)

**DC Output Connector**

USB A

**Dimension Diagram Unit: mm**