




**10 Watt F-Series Adapter with Interchangeable AC Clips  
PSA10F Level V Adapter with DC Cord**

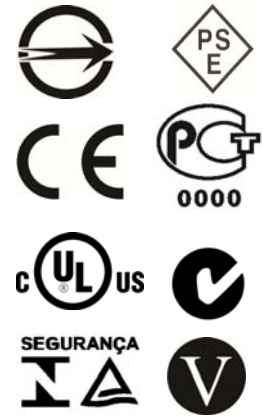

**Features**

- Folding Blades
- Constant Current for Battery Charging
- 15mm Thick with Blades Folded
- Micro-B USB Output
- Interchangeable AC Clips
- Level V Efficiency Compliant
- No load power draw <0.15W

**Applications**

- Tablets
- Networking Equipment
- Personal Electronics
- Peripherals

**Safety Approvals**

- cUL/UL
- C-Tick
- BSMI
- PSE
- CCC
- CE
- SAA
- GOST
- TUV-Brazil

**Mechanical Characteristics**

- Length: 60mm (2.36in)
- Width: 47mm (1.85in)
- Height: 15.0mm (0.59in)
- Weight: 67 (2.36oz)

**Output Specifications**

Model	DC Output Voltage			Load		Efficiency Level
	Min.	Typ.	Max.	Min.	Max.	
PSA10F-050	4.75V	5V	5.25V	0A	2A	V

Phihong is not responsible for any error, and reserves the right to make changes without notice. Please visit our website at [www.phihong.com](http://www.phihong.com) for the most up-to-date specifications and contact information.

**INPUT:**

**AC Input Voltage Range**  
90 to 264V AC

**AC Input Voltage Rating**  
100 to 240V AC

**AC Input Frequency**  
47 to 63Hz

**AC Input Current**  
0.3A RMS maximum at 120V AC  
0.15A RMS maximum at 240V AC

**Leakage Current**  
100uA maximum at 240V AC

**Inrush Current**  
60A at 240V AC

**OUTPUT:**  
**Output Power**  
10W Continuous

**Efficiency**  
79% minimum, meets Level V Requirements

**Standby Power**  
<150mW at 230VAC

**Ripple and Noise**  
100mVp-p at 0A-1A load  
200mVp-p at 1A-2A load

**Current Limit**  
2.5A when less than 3V (auto-restart)

**ENVIRONMENTAL:**

**Temperature**

Operating	0 to 40C
Non-operating	-40 to +85C
Humidity	10 to 90%

**EMI**

FCC Class B, EN55022 Class B

**Immunity**

ESD:	EN61000-4-2	Level 3
Radiated:	EN61000-4-3	Level 2
EFT:	EN61000-4-4	Level 2
Surge:	EN61000-4-5	Level 3
C/T:	EN61000-4-6	Level 2
PFMT:	EN61000-4-8	
VDT:	EN61000-4-11	
Harmonic:	EN61000-3-2	Class A
Flicker:	EN61000-3-3	

**Dielectric Withstand (HI-POT) Test**

Primary to secondary: 3000V AC, 10mA, 60 seconds

**Insulation Resistance**

Primary to secondary: 500V >7M OHM

**FEATURES:**

**Over Voltage Protection**  
Auto-restart 6.3V maximum

**Short Circuit Protection**  
Must withstand continuous short circuit

**Over Temperature Protection**  
Auto shutdown without fault

**DC Output**  
Micro-B USB

**AC Input**  
US Fixed Blade folding prong

**Interchangeable AC Clips (fit over US prongs)**  
FPBAG-H (FPE, FPK, FPS)

FPB:	Brazil	FPI:	India
FPC:	China	FPK:	UK
FPE:	Europe	FPN:	Argentina
FPH:	Korea	FPS:	Australia

(Sold Separately)

**Dimension Diagram Unit: mm**

