



**120 Watt Universal 3-Wire Input Adapter  
PSA120U Adapter Series meets EISA Requirements**



**Features**

- EISA Compliant
- Class B EMI
- Non-vented/Spill-proof Case
- Level IV Efficiency Compliant

**Applications**

- Networking
- Peripherals
- Industrial
- Test and Measurement

**Safety Approvals**

- cUL/UL

**Mechanical Characteristics**

- Length: 174mm (6.85in)
- Width: 77mm (3.03in)
- Height: 43mm (1.69in)
- Weight: 0.8Kg (1.76lbs)

**Output Specifications**

Model <sup>1</sup>	DC Output Voltage	Load		Efficiency Level <sup>3</sup>
		Min. <sup>2</sup>	Max.	
PSA120U-120	12V	0A	10A	IV
PSA120U-240	24V	0A	5.0A	IV
PSA120U-480	48V	0A	2.5A	IV

**Notes:**

- 1 MOQs of 200 pieces for 12V model and 220 pieces for 24V and 48V models.
- 2 Dynamic load from 0.1A to full load.
- 3 Level IV efficient products no longer qualify for CE and may not be sold in countries in the EU

Phihong is not responsible for any error, and reserves the right to make changes without notice. Please visit our website at [www.phihong.com](http://www.phihong.com) for the most up-to-date specifications and contact information.

**Input:**

**AC Input Voltage Rating**  
100 to 240VAC

**AC Input Voltage Range**  
90 to 264VAC

**AC Input Frequency**  
47 to 63Hz

**Input Current**  
2.5A at 100VAC  
1.5A at 240VAC

**Leakage Current**  
3.5mA maximum at 254VAC and 50Hz

**Inrush Current**  
65A at 120VAC  
130A at 240VAC  
(Cold Start at ambient 25°C)

**Input Power Saving**  
<0.5W at no load, 115VAC  
<0.75W at no load, 230VAC

**OUTPUT:**

**Efficiency Level**  
Level IV Compliant  
85% minimum average efficiency

**Over-Voltage Protection**  
Output is protected from over voltage fault at all conditions including open-loop

**Over-Power Protection**  
Auto-Reset

**Ripple (P-P Max)**

12V	150mV
24V	240mV
48V	480mV

(Measured using 12-inch twisted pair terminated with a 10uF capacitor and 0.1uF ceramic in parallel)

**Regulation (Line & Load)**  
±5%

**Short-Circuit Protection**

Output will withstand a short circuit across the outputs with auto-restart function. Output can be shorted without damage.

**ENVIRONMENTAL****Temperature**

Operation	0 to +40°C
Non-operation	-20 to +70°C
Humidity	20 to 80%

**Emissions**

FCC Class B  
EN55022 Class B  
CISPR22 Class B

**Immunity**

ESD	EN61000-4-2
RS	EN61000-4-3
EFT	EN61000-4-4
Surge	EN61000-4-5
CS	EN61000-4-6
Voltage Dips	EN61000-4-11

**Dielectric Withstand (Hi-Pot) Test**

Primary to Secondary: 3000V AC for 1 min., 10mA

**MTBF**

≥100K Hours when operated at 75% continuous load and ambient 25°C

**DC Output Connector (12V model)**

Molex P/N: 39-00-0059  
Connecting Molex P/N: 39-01-3065

<b>Pin</b>	Pin 1: +12V
<b>Connections:</b>	Pin 2: +12V
	Pin 3: +12V
	Pin 4: GND
	Pin 5: GND
	Pin 6: GND


**DC Output Connector (24V, 48V and 56V models)**

2.5 x 5.5mm Center Positive Barrel Standard

**Input Connector**

3-Wire IEC320-C14

PSA120U-120-R

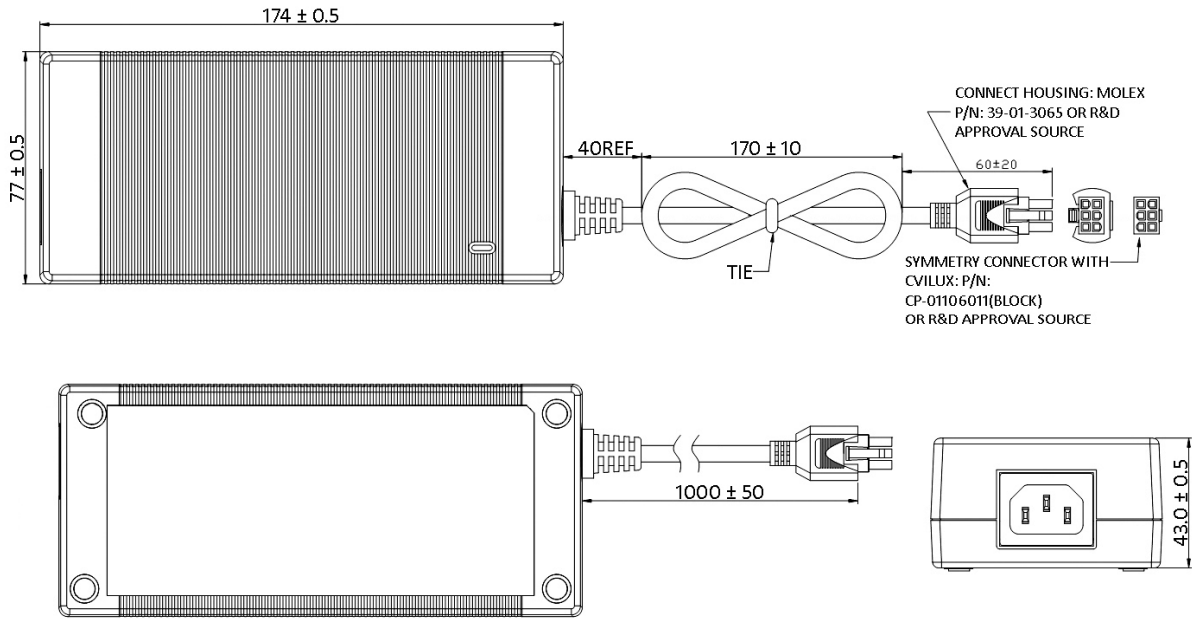

PSA120U-240-R & PSA120U-480-R

