



21W DC-DC Power over Ethernet Splitter POE21 Gigabit IEEE802.3at Compliant Splitter



Features

- Compliant with the IEEE802.3at Standard
- DC Good LED
- 2.5G data speed
- Full Protection OTP, OCP, OVP
- Works with any layer 1 IEEE802.3at Power Sourcing Equipment
- User Changeable Tips
- Non-Vented Case
- 1 Year Warranty

Applications

- IP Telephones
- Wireless Network Access Points
- IP Print Servers
- Height: 27.9mm (1.1in)

Safety Approvals

- CE

Mechanical Characteristics

- Length: 100mm (3.97in)
- Width: 56mm (2.2in)

Output Specifications

Model	DC Output Voltage	Output Current
POE21-120-R1	12V	1.75A
POE21-240-R1	24V	0.875A

Notes:

1. Can only be used with unshielded cables

INPUT:**Input Voltage Range**

Receives power from either data or spare pairs 45-57V DC

Input Current

0.6A (RMS) maximum

OUTPUT:**Regulation**

Line and Load $\pm 4\%$

Ripple

12V 120mVp-p

24V 240mVp-p

Efficiency

80% (typical) at maximum load 48V DC

O/P Voltage Protection

In case of output voltage overload, crowbar will short

ENVIRONMENTAL**Temperature**

Operation 0 to +40°C

Non-operation -20 to +65°C

Humidity 5 to 90%

Immunity

ESD: EN61000-4-2 Level 3

RS: EN61000-4-3 Level 2

EMC

Complies with FCC Class B

Complies with EN55032 Class B

Dielectric withstand (HI-POT) Test

Primary to secondary: 2121VDC for 1 minute
10mA

Insulation Resistance

Primary to secondary: >10M Ohm 500VDC

FEATURES:**Indicators**

GREEN LED – Output Good

Short Circuit Protection

Output can be shorted permanently without damage

Input and Output Data Connector


RJ45

Output Connector

Center Positive Barrel 12mm x 2.1mm x 5.5mm. Tip is user changeable for other sizes



Dimension Diagram Unit: mm

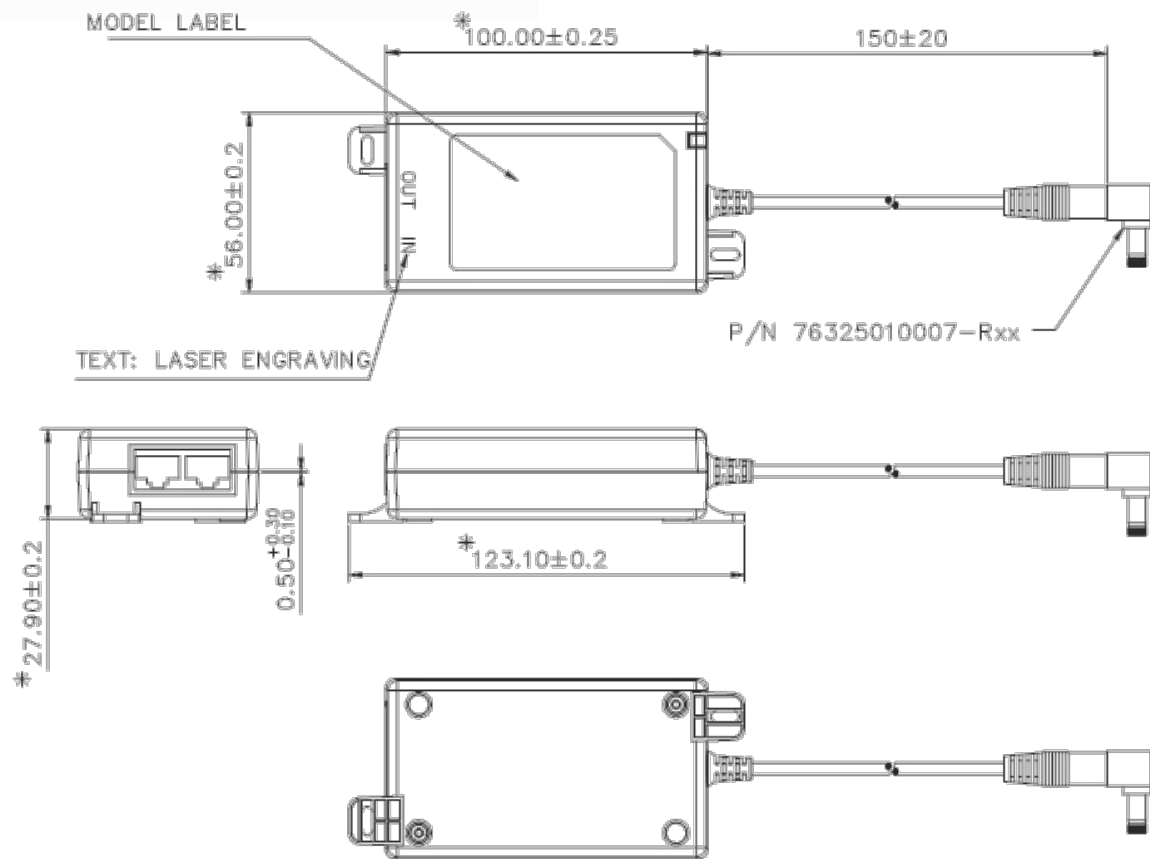



Supplier's Declaration of Conformity
47 CFR § 2.1077 Compliance Information

Phihong USA Corporation
47800 Fremont Boulevard
Fremont, CA 94538
Telephone: (510) 445-0100
www.phihong.com

This device complies with/The devices in this product series comply with part 15 of the FCC Rules. Operation is subject to the following two conditions: (1) This device may not cause harmful interference, and (2) this device must accept any interference received, including interference that may cause undesired operation.