



12 Watt Fixed Wall Plug Series



Features

- Limited Power Source (LPS)
- Class B EMI
- Level VI Compliant
- Class II Double Insulated
- High Efficiency
- Low Cost

Applications

- Wireless Communications
- Peripherals
- Portable Equipment
- PDA

Safety Approvals

- UL/cUL 62368-1

Mechanical Characteristics

- Length: 71.5mm (2.82in)
- Width: 50mm (1.97in)
- Height: 31.2mm (1.23in)
- Weight: 124g (4.37oz)

Output Specifications

Model	DC Output Voltage	Load		Ripple ⁽¹⁾ P-P (max.)	Regulation Line & Load
		Min.	Max.		
PSAC12A-050-R	5V	0A	2.4A	100mV	±5%
PSAC12A-060-R	5.9V	0A	2.0A	100mV	±5%
PSAC12A-075-R	7.5V	0A	1.6A	100mV	±5%
PSAC12A-090-R	9V	0A	1.33A	120mV	±5%
PSAC12A-120-R	12V	0A	1.0A	120mV	±5%
PSAC12A-150-R	15V	0A	0.8A	150mV	±5%
PSAC12A-240-R	24V	0A	0.5A	240mV	±5%
PSAC12A-480-R	48V	0A	0.25A	400mV	±5%

Notes:

1. Measured after 30 minutes with by-pass capacitors 0.1uF/10uF at output connector terminal and oscilloscope set at 20Mhz.

Input:**AC Input Voltage Rating**

100 to 240V AC

AC Input Voltage Range

90 to 264V AC

AC Input Frequency

47 to 63Hz

Input Current

0.5A (RMS) maximum at 120V AC

0.25A (RMS) maximum at 230V AC

Leakage Current

0.25mA maximum at all line conditions

Inrush Current

<30A for 120V AC at maximum load

<60A for 230V AC at maximum load

(Cold start at ambient 25°C)

Input Power Saving

0.1W maximum at no load

Output:**Efficiency²**

US DOE Level VI

Environmental:**Temperature**

Operation 0 to +40°C

Non-operation -40 to +85°C

Humidity 50 to 90%

Emissions

Complies with FCC Class B

Complies with EN55032 Class B

Immunity

IEC610004-2

IEC610004-3

IEC610004-4

IEC610004-5

IEC610004-6

IEC61000-4-8

IEC61000-4-11

EN61000-3-2

Hold-up Time

8mS minimum at 120V AC and maximum load

Over-Voltage Protection

<150%

Over-Current Protection

Output equipped with short circuit protection – auto-restart

Short-Circuit Protection

Output can be shorted without damage

Dielectric Withstand (Hi-pot) Test

Primary to Secondary: 3000V AC for 1 min.,

10mA


DC Output Connector

2.1 x 5.5mm Center Positive Barrel

Notes:

1. The characteristics defined are at ambient temperature of 25°C unless otherwise specified
2. Efficiency is measured after 30 minutes burn-in

Dimension Diagram Unit: mm

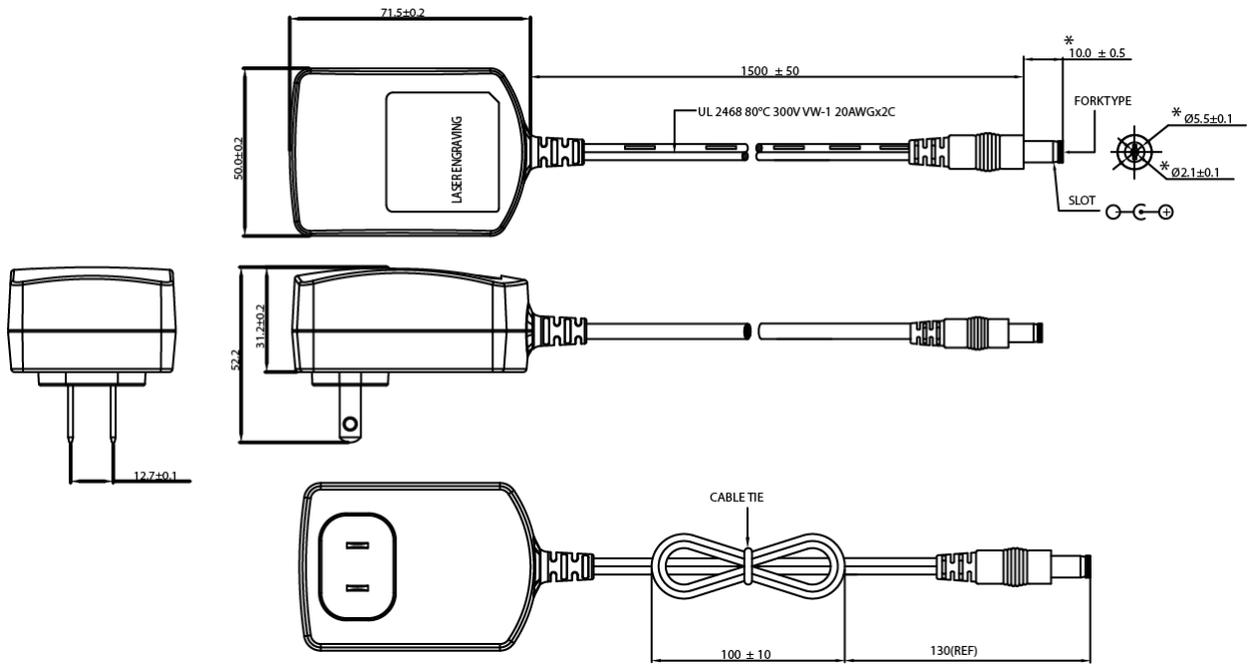

**Supplier's Declaration of Conformity
47 CFR § 2.1077 Compliance Information**

Phihong USA Corporation
47800 Fremont Boulevard
Fremont, CA 94538
Telephone: (510) 445-0100
www.phihong.com

NOTE: The devices in this product series comply with part 15 of the FCC Rules. Operation is subject to the following two conditions: (1) This device may not cause harmful interference, and (2) this device must accept any interference received, including interference that may cause undesired operation.